

Advantages

- Excellent accuracy
- Low thermal drift
- Fast response time
- Excellent linearity

Closed Loop Type




Specifications

Ta=25°C

Product name	Code:1601		CNC-25
	Symbol	Unit	
Nominal input current	If(n)	A	±25
Saturation current	If(s)	A	±60
Nominal Output current	Iout	mA	Io±25 [at If(n)]
conversion ratio			1 : 1000
Offset current	Io	mA	0±0.15 [at 0A]
Supply Voltage	Vcc	V DC	±15±5%
Consumption Current	Icc	mA	10 + Iout
Response Speed	Trr	μ sec	1 Max. [at di/dt=If(n)/μ sec]
Thermal Drift of Vh		%/°C	±0.05 Max. [at If(n)]
Thermal Drift of Io		mA/°C	±0.012 Max. [at 0A]
Dielectric Strength		kV	AC 2.5 [with 50 or 60 Hz 1min.]
Insulation Resistance		Ω	500M Min. [at 500V DC]
Operating Temperature	Ta	°C	-20 to +75
Storage Temperature	Ts	°C	-25 to +85
Hysteresis Error		mA	±0.15 Max. [at If --> 0]
Secondary coil resistance		Ω	58 [at 80°C]

Dimensions


Unit : mm

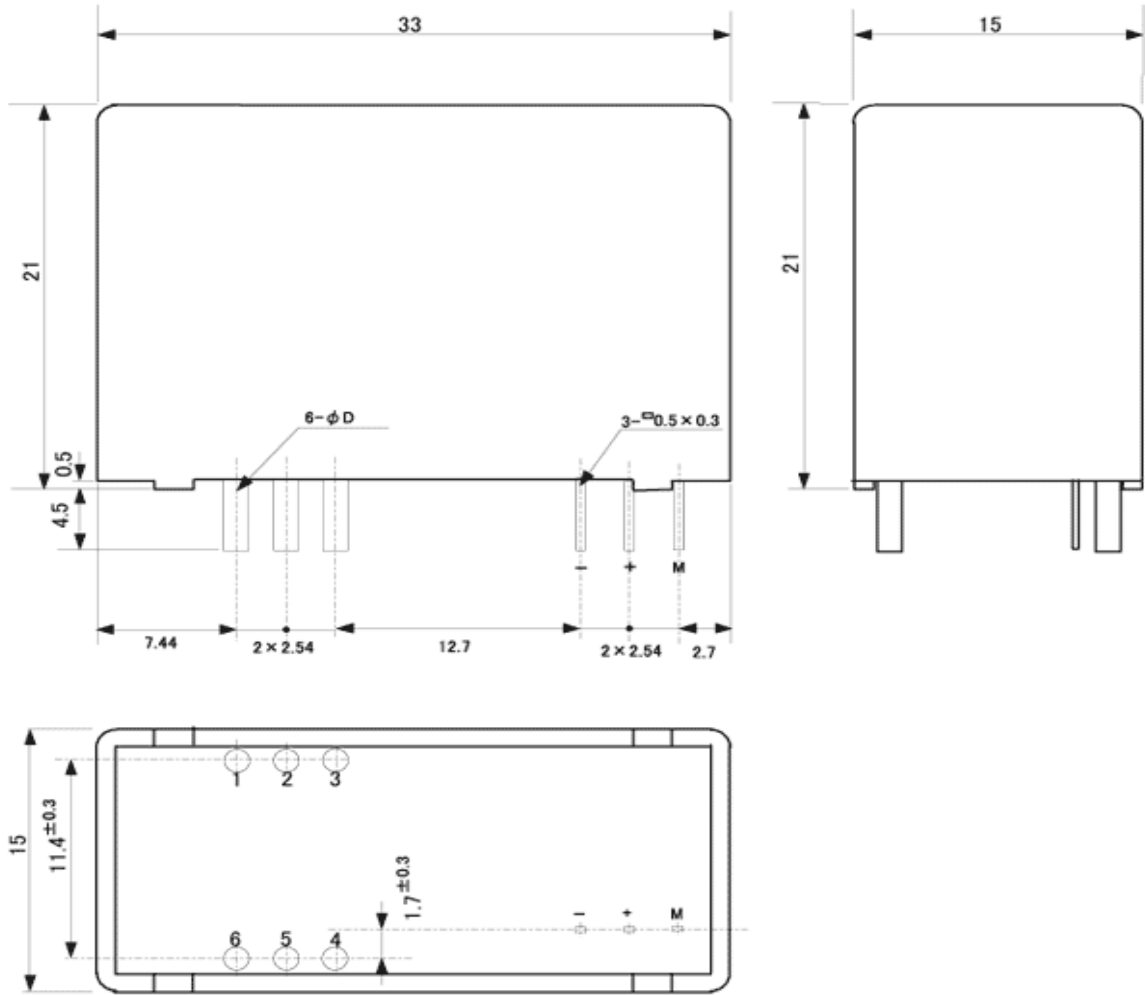


CNC-21010

Product Name	Mass	D ϕ
CNC-25	22g	1.0

Connection

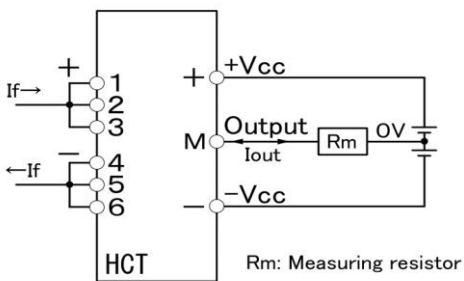

Input / Output characteristics Ta=25°C Vcc=±15V

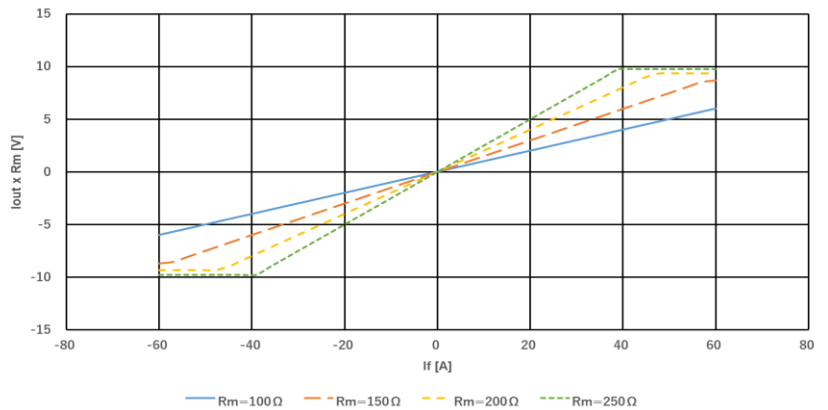

NANA ENGINEERING NANA ENGINEERING CO.,LTD.

1-22-5, Morino, Machida-shi, Tokyo 194-0022
 Machida 310 Irago building 4F
 E-Mail : nanaeng_sales@nana-e.com
 URL : <http://www.nana-e.com>

*Please read the caution of Closed Loop Type before using this product.
http://www.nana-e.com/Precautions_for_use_eng.pdf