

## Advantages

- High reliability
- Excellent accuracy
- Low thermal drift
- Fast response time
- Excellent linearity

## Closed Loop Type

The successor product will be the CSC-J series.




## Specifications

Ta=25°C

Product name	Code:1708		CSC-20
	Symbol	Unit	
Nominal input current	If(n)	A	±200
Saturation current	If(s)	A	±400
Nominal Output current	Iout	mA	I <sub>o</sub> ±100 [at If(n)]
conversion ratio			1 : 2000
Offset current	I <sub>o</sub>	mA	0±0.15 [at 0A]
Supply Voltage	V <sub>cc</sub>	V DC	±15±5%
Consumption Current	I <sub>cc</sub>	mA	20 + I <sub>out</sub>
Response Speed	T <sub>rr</sub>	μ sec	1 Max. [at di/dt=100A/μ sec]
Thermal Drift of V <sub>h</sub>		%/°C	±0.05 Max. [at If(n)]
Thermal Drift of I <sub>o</sub>		mA/°C	±0.012 Max. [at 0A]
Dielectric Strength		kV	AC 2.5 [with 50 or 60 Hz 1min.]
Insulation Resistance		Ω	500M Min. [at 500V DC]
Operating Temperature	T <sub>a</sub>	°C	-20 to +75
Storage Temperature	T <sub>s</sub>	°C	-25 to +85
Hysteresis Error		mA	±0.15 Max. [at If --> 0]
Secondary coil resistance		Ω	23 [at 80°C]

# Dimensions

Unit : mm


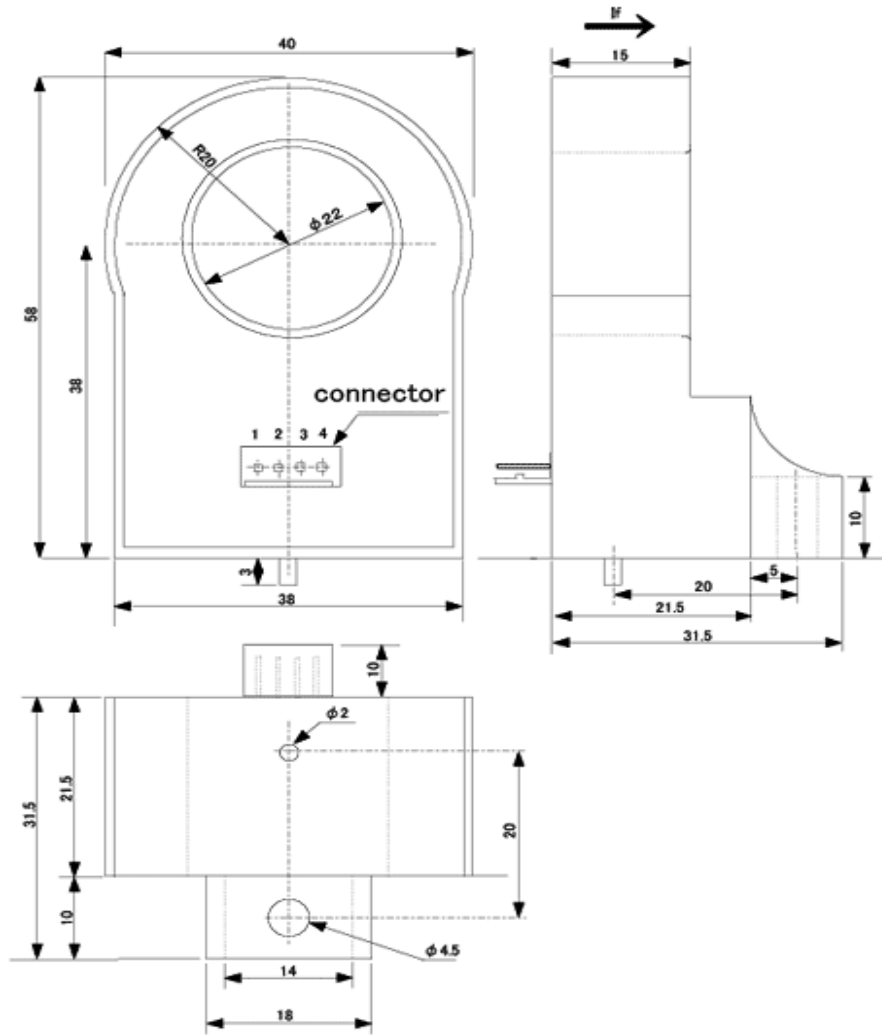


Connector Type[22-11-1041] Maker[Molex]

CSC-21006

Product Name	Mass
CSC-20	52g

# Connection

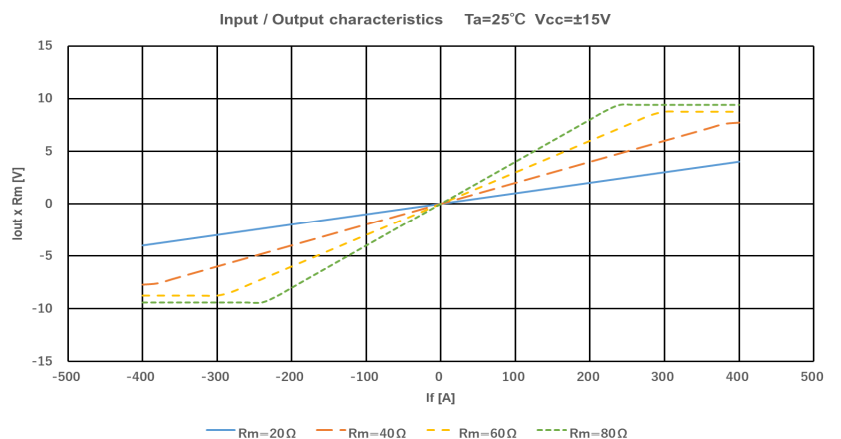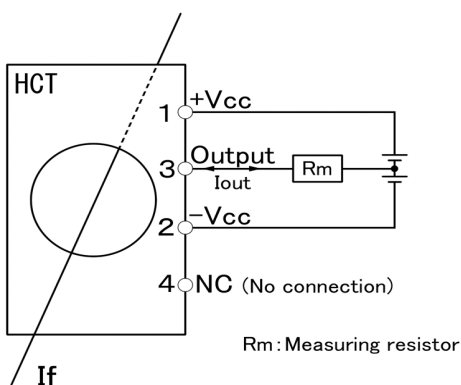

**NANA ENGINEERING** NANA ENGINEERING CO.,LTD.

1-22-5,Morino,Machida-shi,Tokyo 194-0022  
 Machida 310 Irago building 4F  
 E-Mail : nanaeng\_sales@nana-e.com  
 URL : <http://www.nana-e.com>

\*Please read the caution of Closed Loop Type before using this product.  
[http://www.nana-e.com/Precautions\\_for\\_use\\_eng.pdf](http://www.nana-e.com/Precautions_for_use_eng.pdf)